


# MODEL 085




## Drive options

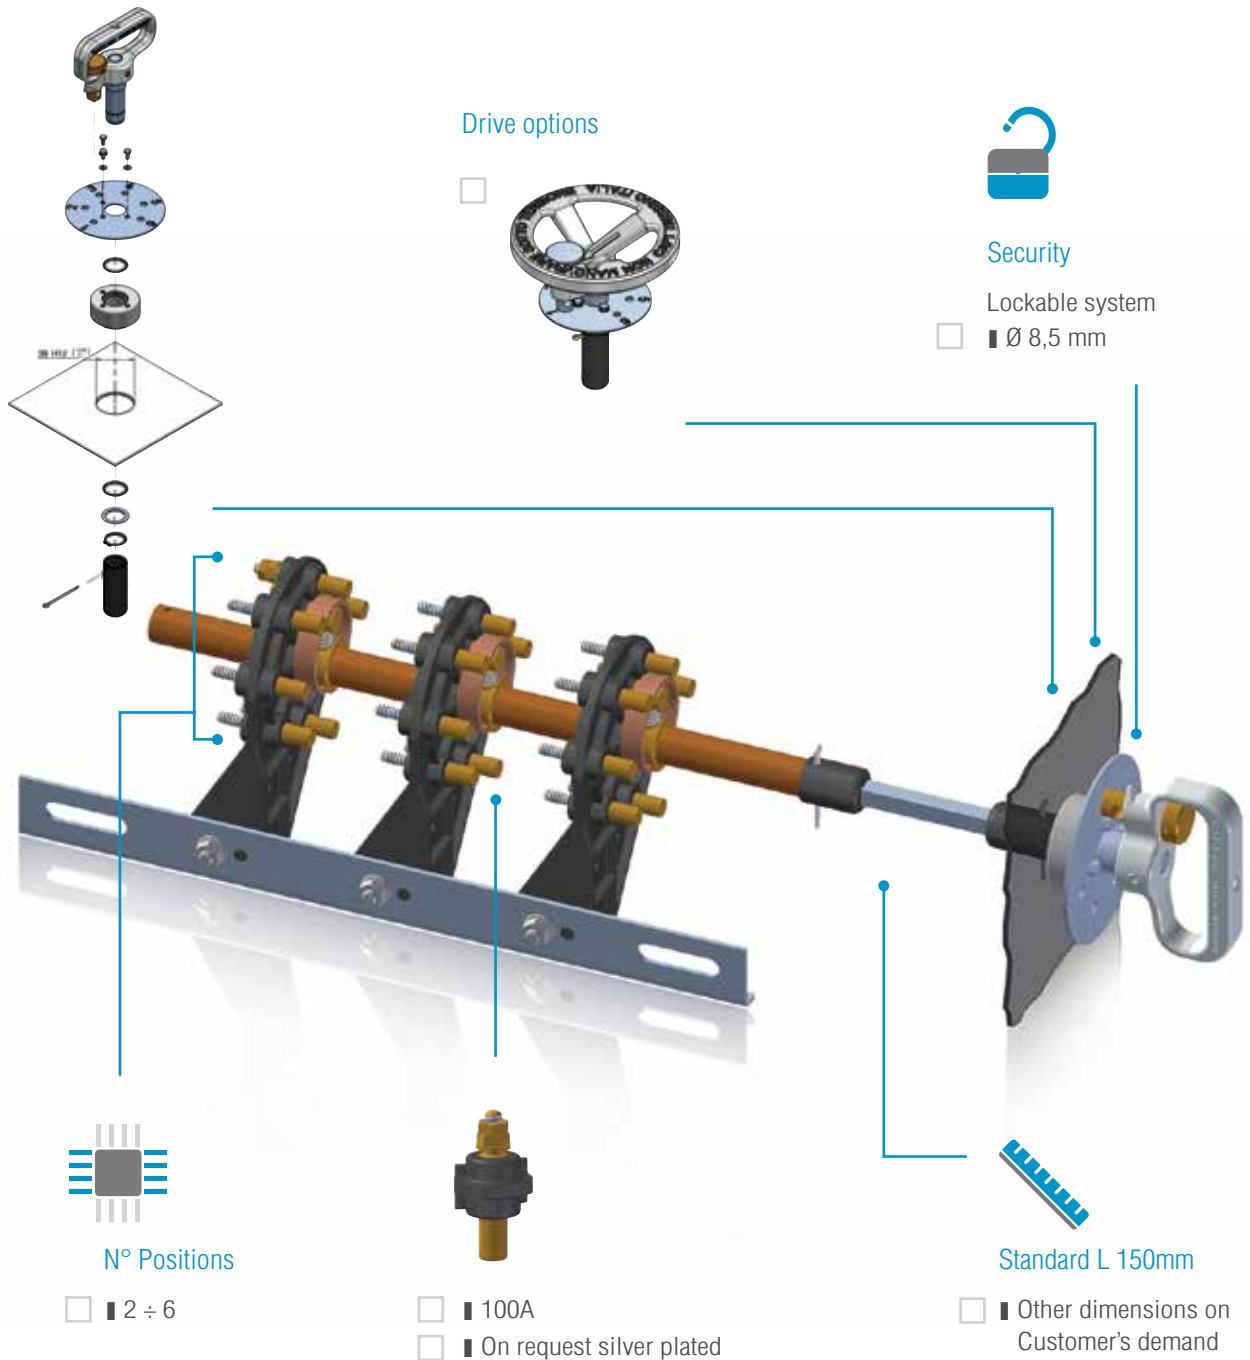

## Security

Lockable system

Ø 8,5 mm



## N° Positions

2 ÷ 6



100A

On request silver plated

## Standard L 150mm

Other dimensions on Customer's demand



## Voltage Max (kV)

24

## Basic Connection (page 30)


- A
- B
- C
- D
- E
- F
- G
- H
- I
- L



Standard IEC 60214

## Orientation numbering

.SO



.SA

