


MODEL 086





Drive options

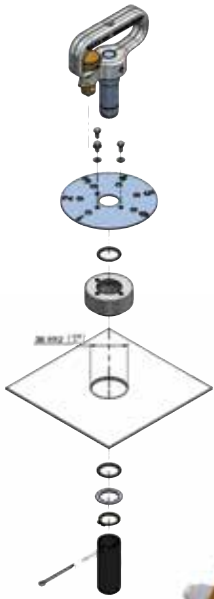

Security

- Lockable system
 Ø 8,5 mm

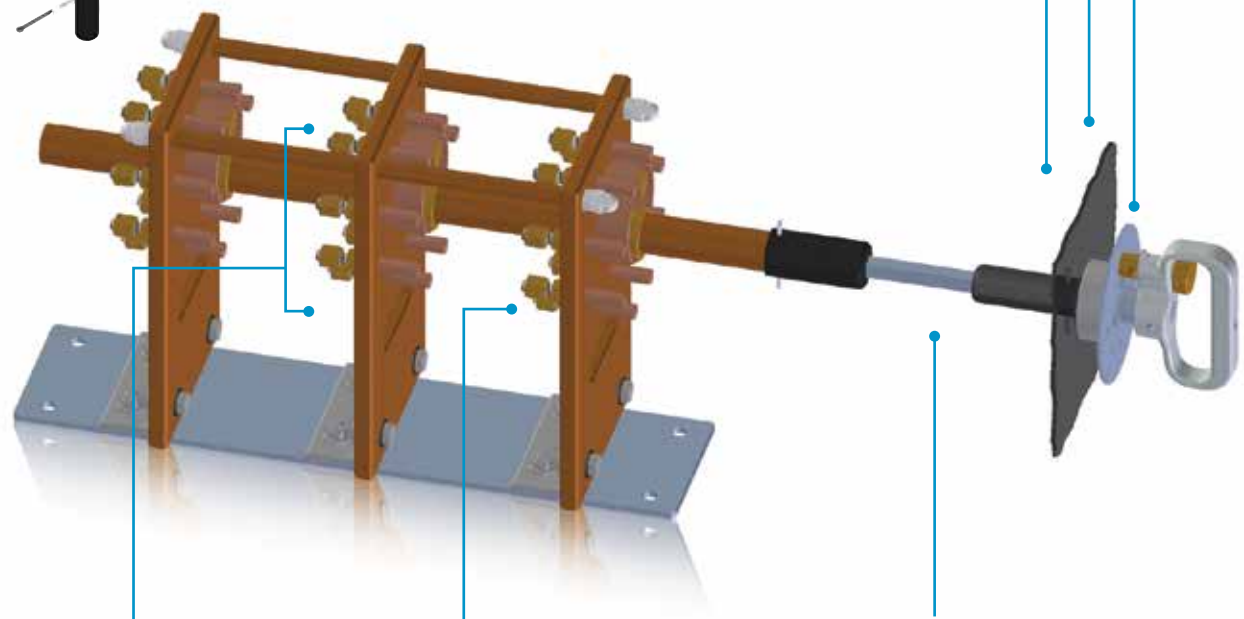

N° Positions

- 2 ÷ 7



- 150A
 200A
 250A
 On request silver plated



Standard L 150mm

- Other dimensions on Customer's demand



Voltage Max (kV)

- 24
 36

Basic Connection (page 30)


- A
 B
 C
 D
 E
 F
 G
 H
 I
 L



Standard IEC 60214

Orientation numbering

.S0



.SA

