



MODEL 099

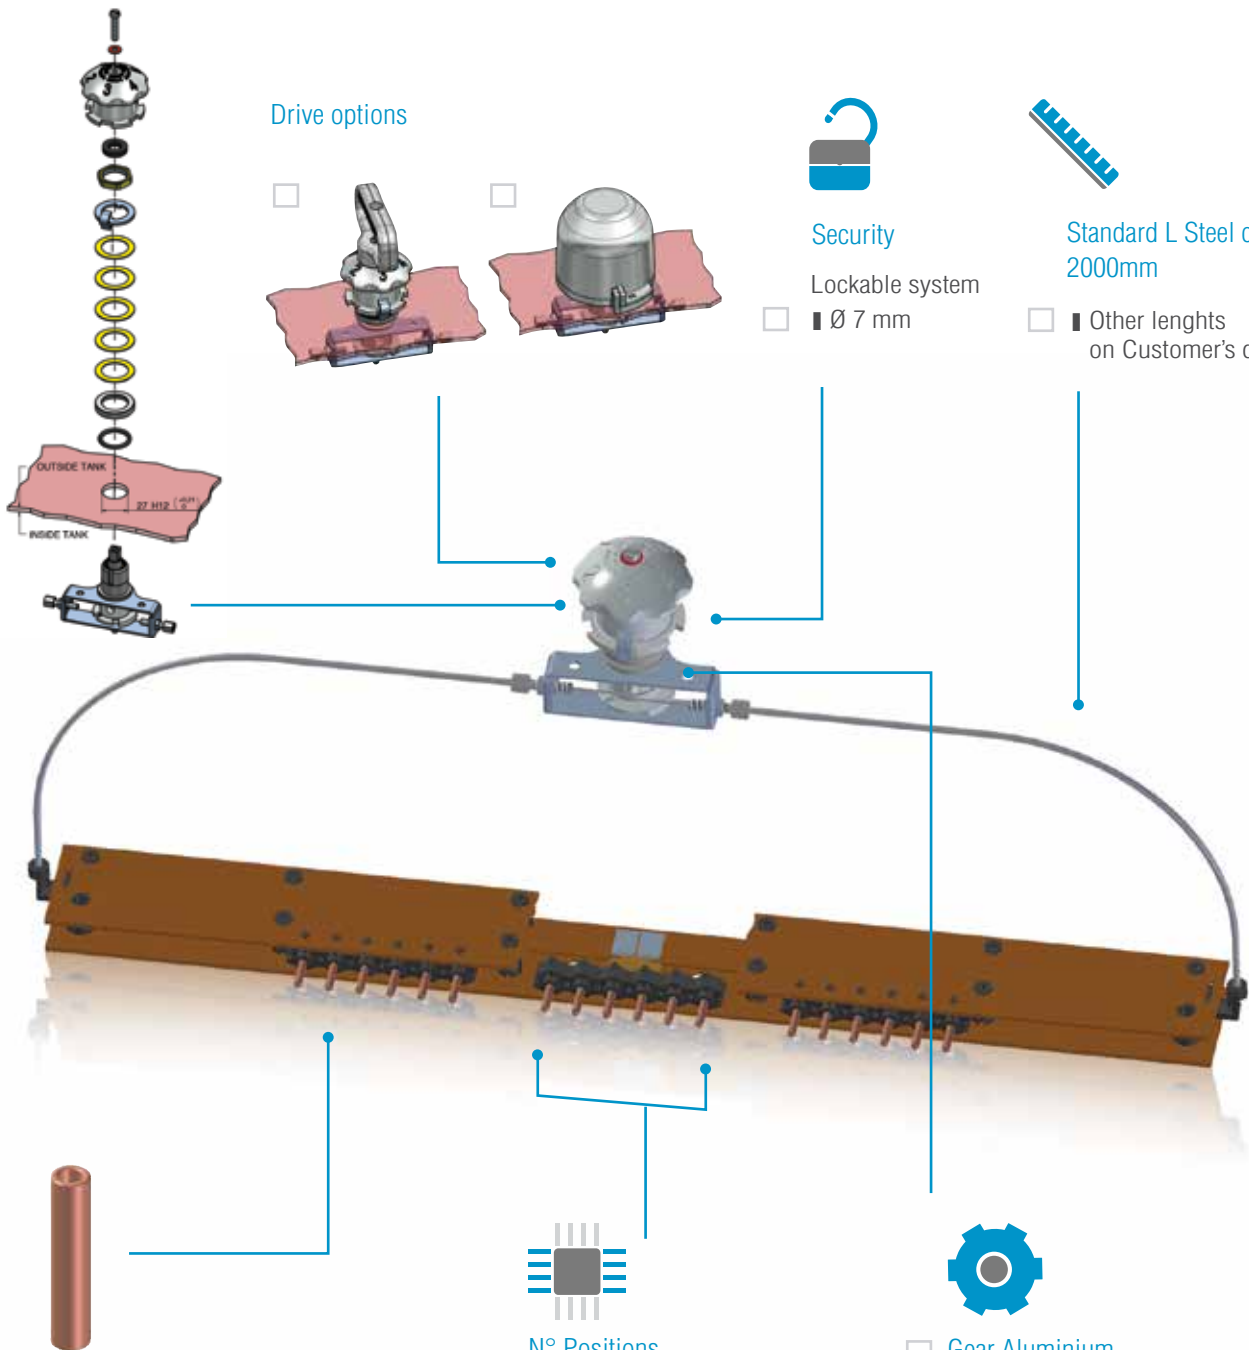


Drive options

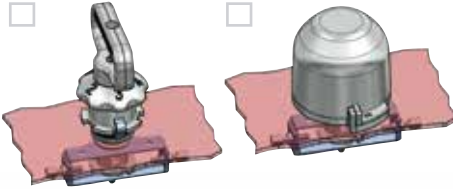

Security

Lockable system

Ø 7 mm




Standard L Steel cable
2000mm

Other lengths
on Customer's demand



- 30A
- 60A
- On request silver plated



N° Positions

2 ÷ 7



Gear Aluminium



Voltage Max (kV)

- 24
- 36

Basic Connection
(page 30)

- A
- B
- C
- D
- E
- F
- G
- H
- I
- L



Standard
IEC 60214

Orientation numbering

